

# GOLDI\_72GN1 - PERC Monocrystalline Module



## Key Features

- Higher module conversion efficiency (up to 19.63%) benefit from Passivated Emitter Rear Contact (PERC) technology
- 10% higher power output compared to industry average modules.
- Up to +3% positive power output guaranteed.
- Reducing equipment loss increases the power generation in overall system.
- Loss minimization due to excellent temperature co-efficient.
- Excellent low light and longer wavelength Response.
- BOS cost Reduction for 1500 VDC System by connecting more modules in a string.
- Better performance even at low irradiance condition.
- Higher specific yield.

## Quality & Reliability

- Manufactured in an ISO 9001:2015, ISO 14001:2015, OHSAS 18001:2007 certified facility.
- Manufactured using high grade raw materials from reputed international suppliers adopting a stringent quality criteria.
- PID resistant (IEC 62804).
- IP67/IP68 rated junction box for long-term weather endurance.
- 25 years output warranty.
- Certified for hail resistance.

## Technical Data for GOLDI\_72GN1 - PERC Monocrystalline Module

### Electrical Parameter at STC

Module Type	GOLDI072FWpPRC24					
Capacity rating - Pmax(Wp)	355	360	365	370	375	380
Power Tolerance (%)	0 - 3	0 - 3	0 - 3	0 - 3	0 - 3	0 - 3
Module efficiency (%)	18.34	18.60	18.86	19.12	19.38	19.63
Rated voltage - Vmp(V)	38.6	38.8	39.1	39.3	39.52	39.75
Rated current - Imp(A)	9.2	9.28	9.34	9.42	9.49	9.56
Open circuit voltage - Voc(V)	47.5	47.7	47.9	48.1	48.4	48.7
Short circuit current - Isc(A)	9.56	9.64	9.72	9.78	9.84	9.92

Under Standard Test Conditions (STC) of irradiance of 1000 W/m<sup>2</sup>, spectrum AM 1.5 and cell temperature of 25°C.

### Mechanical specification

Solar cells	72 pcs PERC Monocrystalline Silicon, 5BB/4BB
Encapsulation	Ultra - clear PID free EVA (Ethylene-Vinyl-Acetate)
Backside	UV protected reflective backsheet
Frame	Silver Anodized Aluminium Alloy (screwless)
Front glass	3.2 mm, High Transmission, AR Coated Tempered Glass
Dimensions	(L) 1955 mm x (W) 990 mm x (H) 35mm
Weight	21.5 kg
J-box	IP67/IP 68 certified 4-rail, 3 diodes junction box
Cable	Solar cable 400mm to 1200 mm length, 4 mm <sup>2</sup>
Connectors	MC4 compatible connectors
Application Class	Class A
Electrical Safety	Class II
Fire Safety	Class C ( Type 1)
Surface load	(snow load 5400 Pa, wind load 2400 Pa).

### Electrical Parameter at NOCT

Capacity rating - Pmax(Wp)	263.75	267.42	271.23	274.95	278.55	282.24
Rated voltage - Vmp(V)	35.81	35.99	36.27	36.46	36.66	36.87
Rated current - Imp(A)	7.37	7.43	7.48	7.54	7.60	7.65
Open circuit voltage - Voc(V)	44.27	44.45	44.64	44.83	45.11	45.39
Short circuit current - Isc(A)	7.74	7.81	7.87	7.92	7.97	8.03

NOCT irradiance of 800 W/m<sup>2</sup>, ambient temperature of 20°C, Wind speed 1m/sec

### Temperature Coefficients (TC)

Temperature Coefficient (Voc)	-0.29% /°C
Temperature Coefficient (Isc)	0.05% /°C
Temperature Coefficient (Pmax)	-0.38% /°C


## Guarantees and certifications

Product warranty**	10 years
Performance guarantee**	Limited warranty for power output :- 90% for 10 years, and 80% for 25 years
Product Certified	IEC 61215, IEC 61730, CE, BIS (In Progress)


### Permissible operating conditions

Temperature range	-40°C to +85°C
Maximum system voltage	1500/1000 VDC
NOCT	45± 2°C
Hail resistance	Maximum diameter of 25 mm with velocity 23 m/s

## IV Curves

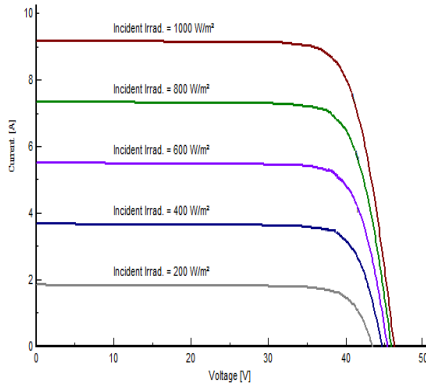

## Drawing measurement in mm

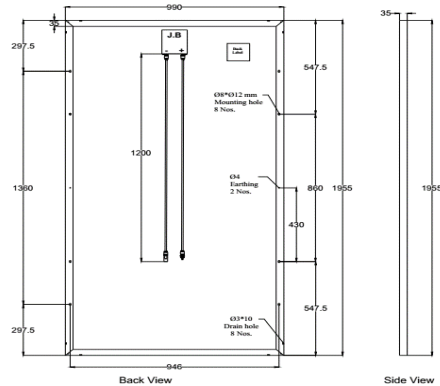

## Packing information

Container	20' GP	40' HC
Pallets/ container	10	24
Modules / Container	300	720

Email: [info@goldi.one](mailto:info@goldi.one)  
 Web: [www.goldi.one](http://www.goldi.one)  
 India Toll Free :1800 833 5511

\* For handling & installation instructions refer Goldi Solar Installation Manual

\*\* Dispose off the product as E-Waste after end of its working life.

\*\*\* Refer to Goldi solar's warranty documents for terms and conditions.

Due to constant product modifications, Goldi Green reserves the right to amend the above specifications without prior notice.